





SIZE	PLY	TREAD DEPTH(MM)	SECTION WIDTH(MM)	OVERALL TYRE DIAMETER (MM)	MAX LOAD (LBS)	PSI
25X8-12/6	6PR	28.6	205	640	340	7
25X10-12/6	6PR	31.7	220	640		7
26X9-12/6	6PR	28.6	210	645	410	7
26X11-12/6	6PR	31.7	225	670	480	7
27X9-12/6	6PR	28.6	210	690	440	7
27X11-12/6	6PR	31.7	225	676	495	7
27X10-14/6	6PR	31.7	220	674		18
28X10-14/6	6PR	31.7	220	720		18
30X10-14/6	6PR	31.7	230	770	1134	18
26X9-14/6	6PR	31.7	210	664		18
26X11-14/6	6PR	31.7	220	674	966	18

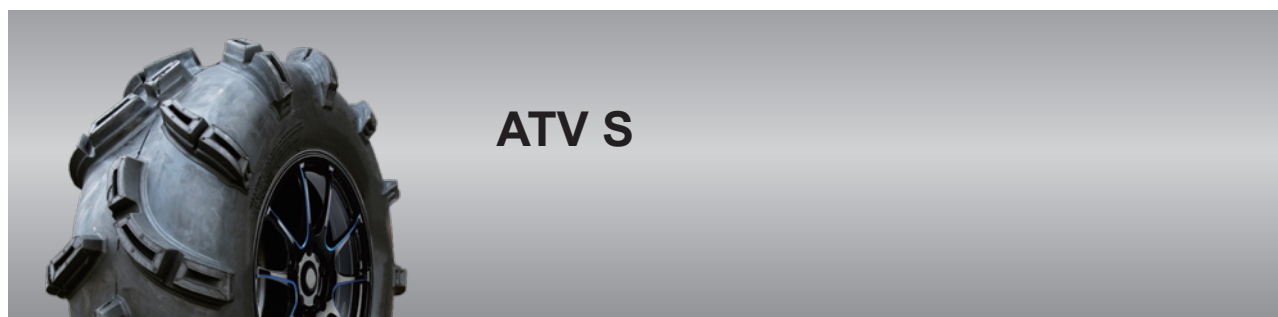

SIZE	PLY	TREAD DEPTH(MM)	SECTION WIDTH(MM)	OVERALL TYRE DIAMETER (MM)	MAX LOAD (LBS)	PSI
25X8R12/8	8PR	20.3	205	640	696	18
25X10R12/8	8PR	20.3	220	639	855	18
30X10R14/8	8PR	20.3	230	770	1134	18
32X10R14/8	8PR	25.4	240	825	1293	18
27X9R14/8	8PR	20.3	215	688	849	18
27X11R14/8	8PR	20.3	225	709	1041	18
26X9R14/8	8PR	20.3	215	670	801	18
26X11R14/8	8PR	20.3	225	674	966	18
26X9R12/8	8PR	20.3	215	668	828	18
26X11R12/8	8PR	20.3	225	674	996	18
28X10R14/8	8PR	20.3	220	720	1002	18
31X10R17	8PR	19.1	220	765		18
30X10R15	8PR	19.1	220	740		18

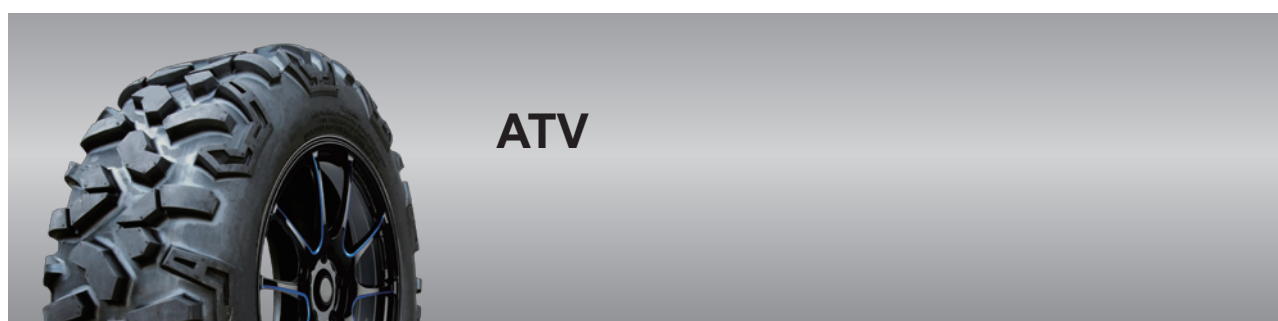

ATV M1

SIZE	PLY	TREAD DEPTH(MM)	SECTION WIDTH(MM)	OVERALL TYRE DIAMETER (MM)	MAX LOAD (LBS)	PSI
25X10-12/6	6PR	25.4	220	648	420	7
26X9-12/6	6PR	25.4	215	668	410	7
27X9-12/6	6PR	25.4	215	684	440	7
26X11-12/6	6PR	25.4	225	674	480	7
27X11-12/6	6PR	25.4	230	690	495	7
25X8-12/6	6PR	25.4	205	644		7
26X9-14/6	6PR	25.4	210	668	801	10
26X11-14/6	6PR	25.4	230	664	966	10
27X9-14/6	6PR	25.4	215	690		10
27X11-14/6	6PR	25.4	230	695	1041	10
28X10-14/6	6PR	31.7	220	718		10



ATV M2MAX

SIZE	PLY	TREAD DEPTH(MM)	SECTION WIDTH(MM)	OVERALL TYRE DIAMETER (MM)	MAX LOAD (LBS)	PSI
30X10-14/8	8PR	38.1	230	770	1134	18
31X10-15	8PR	38.1	230	785	1185	18
32X10-17	8PR	38.1	230	830	1209	18
34X10-17	8PR	38.1	240	866		18



ATV M2

SIZE	PLY	TREAD DEPTH(MM)	SECTION WIDTH(MM)	OVERALL TYRE DIAMETER (MM)	MAX LOAD (LBS)	PSI
25X8-12/6	6PR	19.05	200	635	340	7
25X10-12/6	6PR	25.4	215	645	420	7
26X9-12/6	6PR	28.5	215	665		7
26X10-12/6	6PR	21.6	220	666	440	7
26X11-12/6	6PR	28.5	225	668	480	7
26X12-12	6PR	28.5	250	668	531	7
27X9-12/6	6PR	28.5	220	684	440	7
27X10-12/6	6PR	28.5	225	692	470	7
27X12-12	6PR	28.5	250	684	564	7
27X9-14/6	6PR	28.5	202	692	849	18
27X11-14/6	6PR	28.5	215	692	1041	18
28X9-12/6	6PR	28.5	220	710	462	7
28X11-12/6	6PR	28.5	225	714		7
28x9-14/6	6PR	28.5	220	710		18
28X10-14/6	6PR	28.5	220	718	1002	18
30X9-14/8	8PR	31.8	210	770	1050	18
30X9-17/8	8PR	31.8	210	767	972	18
29X9-15/6	6PR	31.8	210	740		18
30X11-14	8PR	31.8	230	770	1224	18
30X11-17	8PR	31.8	230	770	1182	18



SIZE	STANDARD RIM	SECTION WIDTH (MM)	OVERALL DIA (MM)
5.00-8	3.0	120	455
6.00-9	4.0	132	530
6.50-10	5.0	162	576
7.00-12	5.0	177	660
28*9-15	7.0	218	697
7.50-15	6.0	180	760
7.50-16	6.0	180	760
8.25-15	6.5	212	819
8.25-16	6.5	212	819
18*7-8	4.33R	154	457
18*7-8	4.33R	154	457
7.00-9	5.0	172	553
8.25-12	5.0	180	704
23*9-10	6.5	172	576
23*9-10	6.5	172	576
250-15	7.0	236	720
3.00-15	8.0	255	825
3.00-15	8.0	255	825
9.00-20	7.0	246	1010
12.00-20	8.5	222	1100
10.00-20	7.0	246	1010
50*20-24	12.0	500	1200
36*14-20	9.0	350	905



SIZE	RIM	PLY RATING	PRESSURE (KPA)	SW (MM)	OD (MM)
5.00-8	3.50D	8,10	800	137	470
6.00-9	4.00E	10,12	850	160	540
6.50-10	5.00F	10,12	775	175	590
7.00-9	5.00S	10,12	850	190	590
7.00-12	5.00S	12,14	850	190	676
28*9-15	7.00	14,16	700	220	710
8.25-12	6.50	12	750	235	765
8.25-15	6.50	14	800	235	840
9.00-20	7.00	14	760	259	1018
10.00-20	7.50	14	690	278	1055
12.00-20	8.50	16	690	315	1125

To create a leading
brand of tire industry

Agricultural Tyre




SIZE	RIM	PLY RATING	SW (MM)	OD (MM)
400-8TT	3.00D	4	110	435
4.00-10TT	3.00D	4	112	485
400-12TT	3.00D	4	112	535
400-16TT	3.00D	4	110	640
500-12TT	4.00E	6	145	590
600-12TT	4.50E	8	165	640
600-14TT	4.50E	8	165	690
600-16TT	4.50E	8	165	745
650-16TT	4.50E	8	180	765
750-16TT	5.50F	8	205	810
750-20TT	5.50F	8	205	910
8.3-20TT	W7	6	210	895
8.3-24TT	W7	6	210	995
9.5-16TT	W8	8	250	860
9.5-20TT	W8	8	240	950
9.5-24TT	W8	6	240	1050
9.5-32TT	W8	6	240	1250
10.00/75-15.3TT	9	8	264	760
11.2-20TT	W10	6	285	1005
11.2-24TT	W10	6	285	1105
11.2-28TT	W10	6	285	1205
11.2-38TT	10	8	284	1459
12.4-24TT	W11	8	315	1160
12.4-28TT	W11	8	315	1260
13.6-24TT	W12	10	345	1210
13.6-28TT	W12	8	345	1310
14.9-24TT	W13	8	378	1265
14.9-28TT	W13	8	378	1365
14.9-30TT	W13	10	378	1415
15.5-38TT	W14L	12	395	1570
16.9-28TT	W15L	8	430	1435
16.9-30TT	W15L	10	430	1485
16.9-34TT	W15L	10	430	1585
18.4-30TT	W16L	10	467	1550
18.4-34TT	W16L	10	467	1655
18.4-38TT	W16L	10	467	1755
20.8-38TT	8	10	528	1835



SIZE	RIM	SW (MM)	OD (MM)
11.2R24	W10	285	1105
12.4R24	W11	315	1160
13.6R24	W12	345	1210
14.9R24	W13	378	1265
12.4R28	W11	315	1260
13.6R28	W12	345	1310
14.9R28	W13	378	1365
16.9R28	W15L	430	1435
16.9R30	W15L	430	1485
18.4R30	W15L	467	1550

To create a leading
brand of tire industry

OTR Tyre

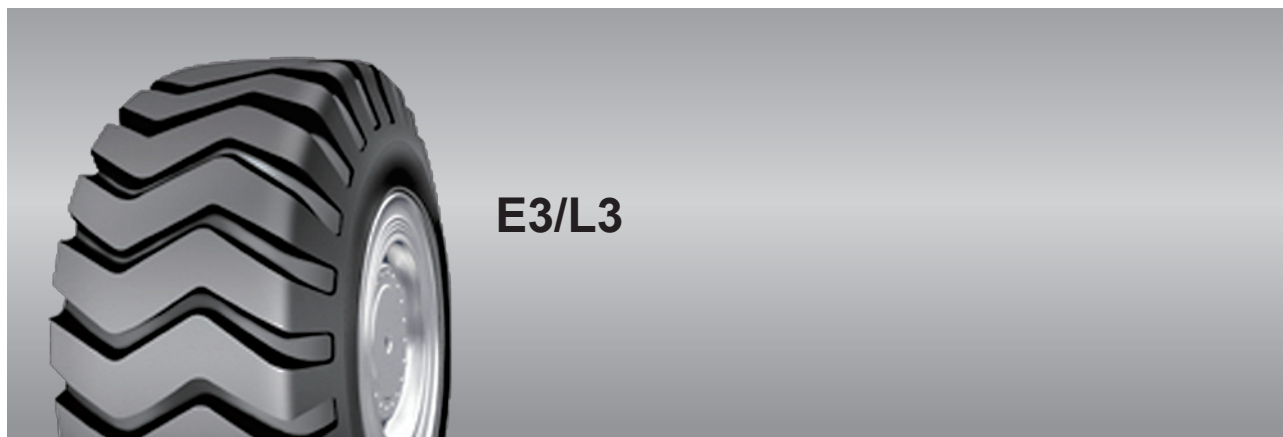

SIZE	PLY RATING	STANDARD RIM	PRESSURE (KPA)	SW (MM)	OD (MM)
14.00-24	16,20,24,28	10	700	375	1370
14.00-25	20,24,28	10	850	366	1318
15.5-25	16,20	12.00/1.3	525	395	1275
16.00-24	24,28,32	11.25	475	430	1490
16.00-25	28,32,36,40	11.25/2.0	760	430	1490
17.5-25	16,20,24	14.00/1.5	575	445	1350
18.5-25	32,36,40	13.00-2.5	850	495	1615
20.5-25	16,20,24	17.00/2.0	450	520	1490
23.5-25	20,24,28	19.50/2.5	375	595	1615
26.5-25	24,28	22.00/3.0	375	675	1798
29.5-25	28,32	25.00/3.5	425	750	1875
29.5-29	28,32	25.00/3.5	425	750	1975
33.25-29	38	27.00-3.5	450	845	2090