



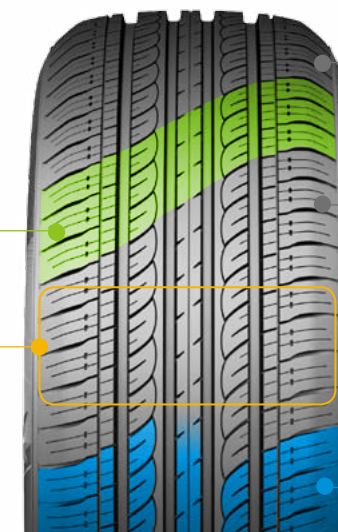

Features & Benefits

Balanced performance: Silence, Fuel Efficiency, Security, Comfort.

Variable pitch and noise reducing shoulder deliver silent journey.



Silica compound provides excellent fuel efficiency.



Special tread outline and section design improve handling stability and comfort.



All season design.

UTQG:440/AA/A

ComfortMax AS H202

ComfortMax AS H202 is designed for economic cars. The variable pitch and special tread block design provide super silence and excellent grip. The silica compound delivers reduced rolling resistance and fuel efficiency. Optimized outline provides comfortable journey.

Economic Summer



Comfort



Fuel-saving



Silence



Safety

Rim	Sizes					XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch				
								kg		kPa	mm	mm
13	155	/	70	R	13		75T	4.5	387	300	548	157
	165	/	65	R	13		77T	5.0	412	300	544	170
	165	/	70	R	13		79T	5.0	437	300	562	170
	165	/	70	R	13	XL	83T	5.0	487	340	562	170
	175	/	70	R	13		82T	5.0	475	300	576	177
	185	/	70	R	13		86T	5.5	530	300	590	189
14	155	/	65	R	14		75T	4.5	387	300	558	157
	165	/	60	R	14		75H	5.0	387	300	554	170
	165	/	65	R	14		79H	5.0	437	300	570	170
	165	/	70	R	14		81T	5.0	462	300	588	170
	175	/	65	R	14		82H	5.0	475	300	584	177
	175	/	65	R	14	XL	86T	5.0	530	300	584	177
	175	/	70	R	14		84H	5.0	500	300	602	177
	185	/	65	R	14		86H	5.5	530	300	596	189
	195	/	60	R	14		86H	6.0	530	300	590	201
	205	/	60	R	14		88H	6.0	560	300	602	209
	205	/	70	R	14		95H	6.0	690	300	644	209
	215	/	70	R	14		96H	6.5	710	300	658	221
15	175	/	55	R	15		77H	5.5	412	300	573	182
	175	/	60	R	15		81H	5.0	462	300	591	177
	175	/	65	R	15		84H	5.0	500	300	609	177
	185	/	65	R	15		88H	5.5	560	300	621	189
	185	/	65	R	15	XL	92H	5.5	560	340	621	189
	195	/	55	R	15		85V	6.0	515	300	595	201
	195	/	60	R	15		88V	6.0	560	300	615	201
	195	/	65	R	15		91V	6.0	615	300	635	201
	195	/	65	R	15	XL	95H	6.0	690	340	635	201
	205	/	60	R	15		91V	6.0	615	300	627	209
	205	/	65	R	15		94V	6.0	670	300	647	209
	215	/	60	R	15		94V	6.5	670	300	639	221
	215	/	65	R	15		96V	6.5	710	300	661	221
	215	/	65	R	15	XL	100H	6.5	800	340	661	221
16	195	/	60	R	16		89H	6.0	580	300	640	201
	205	/	45	R	16	XL	87V	6.0	545	340	590	206
	205	/	55	R	16		91V	6.5	615	300	632	214
	205	/	60	R	16		92V	6.0	630	300	652	209
	205	/	60	R	16	XL	96H	6.0	710	340	652	209
	205	/	65	R	16		95H	6.0	690	300	672	209
	215	/	60	R	16		95V	6.5	690	300	664	221
	215	/	60	R	16	XL	99H	6.5	775	340	664	221
	215	/	65	R	16		98H	6.5	750	300	686	221
	225	/	60	R	16		98H	6.5	750	300	676	228
	225	/	70	R	16		103T	6.5	875	300	722	228
	235	/	60	R	16		100H	7.0	800	300	688	240
	215	/	60	R	17		96H	6.5	710	300	690	221
	225	/	65	R	17		102H	6.5	850	300	724	228
17	235	/	65	R	17		104H	7.0	900	300	738	240
18	225	/	60	R	18		100H	6.5	800	300	727	228



Features & Benefits

- Special asymmetrical design provides excellent grip and handling in both dry and wet conditions.
- Revolutionary tread design, rising strength from inside to outside, can deal with both smooth mountain road and downpour highway, at leisure.
- The updated SSBR and silica compound provide excellent wet grip, much reduced rolling resistance, and terrific handling in high speed.
- The dramatic 2 central big grooves with special compound, enhances efficient water evacuation to deal with all conditions.
- Sipes on outside shoulder enhance turning handling and low down noise in high speed.



UTQG:280/AA/A

Rim	Sizes					XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch				
16	195	/	45	R	16	XL	84V	6.5	500	340	582	195
	195	/	50	R	16	XL	88V	6.0	560	340	602	201
	195	/	55	R	16	XL	91V	6.0	615	340	620	201
	205	/	45	ZR	16	XL	87W	7.0	545	340	590	206
	205	/	50	ZR	16	XL	91W	6.5	615	340	612	214
	205	/	55	ZR	16		91W	6.5	615	300	632	214
	205	/	55	ZR	16	XL	94W	6.5	670	340	632	214
	215	/	45	ZR	16	XL	90W	7.0	600	340	600	213
	215	/	55	ZR	16	XL	97W	7.0	730	340	642	226
	225	/	50	ZR	16	XL	96W	7.0	710	340	632	233
	225	/	55	ZR	16	XL	99W	7.0	775	340	654	233
	205	/	40	ZR	17	XL	84W	7.5	500	340	596	212
17	205	/	45	ZR	17	XL	88W	7.0	560	340	616	206
	215	/	40	ZR	17	XL	87W	7.5	545	340	604	218
	215	/	45	ZR	17	XL	91W	7.0	615	340	626	213
	215	/	50	ZR	17	XL	95W	7.0	690	340	648	226
	215	/	55	ZR	17	XL	98W	7.0	750	340	668	226
	225	/	45	ZR	17	XL	94W	7.5	670	340	634	225
	225	/	50	ZR	17	XL	98W	7.0	750	340	658	233
	225	/	55	ZR	17	XL	101W	7.0	825	340	680	233
	235	/	45	ZR	17	XL	97W	8.0	730	340	644	236
	235	/	50	ZR	17	XL	100W	7.5	800	340	668	245
	235	/	55	ZR	17	XL	103W	7.5	875	340	690	245
	245	/	40	ZR	17	XL	95W	8.5	690	340	628	248
18	245	/	45	ZR	17	XL	99W	8.0	775	340	652	243
	255	/	45	ZR	17	XL	102W	8.5	850	340	662	255
	215	/	35	ZR	18	XL	84W	7.5	500	340	607	218
	215	/	45	ZR	18	XL	93W	7.0	650	340	651	213
	225	/	40	ZR	18	XL	92W	8.0	630	340	637	230
	225	/	45	ZR	18	XL	95W	7.5	690	340	659	225
	235	/	40	ZR	18	XL	95W	8.5	690	340	645	241
	235	/	45	ZR	18	XL	98W	8.0	750	340	669	236
	235	/	50	ZR	18	XL	101W	7.5	825	340	693	245
	245	/	40	ZR	18	XL	97W	8.5	730	340	653	248
	245	/	45	ZR	18	XL	100W	8.0	800	340	677	243
	255	/	45	ZR	18	XL	103W	8.5	875	340	687	255
19	235	/	35	ZR	19	XL	91W	8.5	615	340	647	241
	235	/	45	ZR	19	XL	99W	8.0	775	340	695	236
20	245	/	35	ZR	19	XL	93W	8.5	650	340	655	248
	225	/	35	ZR	20	XL	90W	8.0	600	340	666	230
	235	/	35	ZR	20	XL	92W	8.5	630	340	672	241
	245	/	35	ZR	20	XL	95W	8.5	690	340	680	248
	255	/	35	ZR	20	XL	97W	9.0	730	340	686	260

SportMax
S2000



SportMax S2000 seeks exercise limit and extreme experience. The excellent high speed ability, handling in both dry and wet conditions, security and green design, make it to be preferred choice for luxury cars. Her stable performance is worthy of your trust.

Summer UHP



Breaking



Drainage



Handling



Fuel-saving




Features & Benefits

- Balanced performance: Stability, Silence, Security, Mileage.
- Asymmetrical tread design provides excellent grip and handling.

- Silica compound delivers reduced rolling resistance for better fuel efficiency.



- Strong block tread design improves mileage, stability, and security.

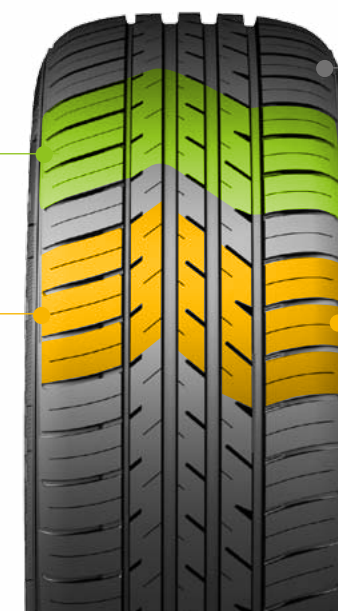

UTQG:420/A/A

ComfortMax S801

ComfortMax S801 is designed especially for successful people. The advanced asymmetrical tread design brings super silence, excellent grip in wet and dry conditions, handling, and uncommon driving experiences. The silica compound delivers reduced rolling resistance for better fuel efficiency. Sizes from 13" to 17" meet your different demand.

Summer HP



Comfort



Fuel-saving



Silence



Safety

Rim	Sizes					XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch				
14	185	/	60	R	14		82H	5.5	475	300	578	189
	185	/	65	R	14		86H	5.5	530	300	596	189
	185	/	70	R	14		88H	5.5	560	300	616	189
	195	/	70	R	14		91H	6.0	615	300	630	201
	195	/	70	R	14	XL	95T	6.0	690	340	630	201
15	185	/	55	R	15		82V	6.0	475	300	585	194
	185	/	60	R	15		84H	5.5	500	300	603	189
	185	/	60	R	15	XL	88H	5.5	560	340	603	189
	185	/	65	R	15		88H	5.5	560	300	621	189
	185	/	65	R	15	XL	92H	5.5	630	340	621	189
	195	/	50	R	15		82V	6.0	475	300	577	201
	195	/	55	R	15		85V	6.0	515	300	595	201
	195	/	60	R	15		88V	6.0	560	300	615	201
	195	/	65	R	15		91V	6.0	615	300	635	201
	195	/	65	R	15	XL	95H	6.0	690	340	635	201
	205	/	65	R	15		94V	6.0	670	300	647	209
	215	/	65	R	15		96H	6.5	710	300	661	221
	215	/	65	R	15	XL	100H	6.5	800	340	661	221
	205	/	50	R	16		87V	6.5	545	300	612	214
	205	/	55	R	16		91V	6.5	615	300	632	214
16	205	/	60	R	16		92V	6.0	630	300	652	209
	205	/	60	R	16	XL	96H	6.0	710	340	652	209
	215	/	60	R	16		95V	6.5	690	300	664	221
	215	/	60	R	16	XL	99H	6.5	775	340	664	221
	215	/	65	R	16		98H	6.5	750	300	686	221
	225	/	55	R	16		95V	7.0	690	300	654	233
	225	/	60	R	16		98H	6.5	750	300	676	228
	225	/	60	R	17		99H	6.5	775	300	702	228
17	225	/	65	R	17		102H	6.5	850	300	724	228



SportMax XAS H2000



SportMax AS H2000 is designed for top grade users seeking ultra-high performance. The asymmetrical, unidirectional tread design provides excellent handling and comfort. All season design delivers excellent wet grip. It delivers all outstanding performance and brings you excellent fun of driving.

All Season UHP



Breaking



Drainage



Handling



Fuel-saving

Features & Benefits

- The asymmetrical design provides excellent grip in both dry and wet conditions, enhances turning handling.
- Variable pitch on both sides reduces noise.
- The updated SSBR and silica compound provide excellent wet grip, much reduced rolling resistance, and terrific handling in high speed.



- The corrugated central grooves direct water, the wide-angle grooves enhance anti-hydroplaning capabilities. It runs easily on downpour highway.



- Strong circumferential central rib improves straight line stability.

- Rim protector designed.



UTQG:420/AA/A

Rim	Sizes					XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch				
16	205	/	50	ZR	16		87W	6.5	545	300	612	214
	205	/	55	ZR	16		91W	6.5	615	300	632	214
	215	/	55	ZR	16		93W	7.0	650	300	642	226
	225	/	55	ZR	16		95W	7.0	690	300	654	233
17	205	/	45	ZR	17	XL	88W	7.0	560	340	616	206
	215	/	45	ZR	17	XL	91W	7.0	615	340	626	213
	225	/	45	ZR	17	XL	94W	7.5	670	340	634	225
	235	/	45	ZR	17	XL	97W	8.0	730	340	644	236
18	245	/	45	ZR	17	XL	99W	8.0	775	340	652	243
	225	/	40	ZR	18	XL	92W	8.0	630	340	637	230
	235	/	40	ZR	18	XL	95W	8.5	690	340	645	241
	245	/	40	ZR	18	XL	97W	8.5	730	340	653	248



Features & Benefits

- 4 wide circumferential grooves with lugs provide effective water drainage, improve security in wet conditions.
- Crooked sipes reduce water film a lot and prevent hydroplaning.

- Solid uniform tread blocks with circumferential ribs improve straight line stability.

- Step grooves floor prevents pebbles.

- 3D steps on shoulder, provides attractive appearance and improves heat dissipation.



PracticalMax HIT RS21

PracticalMax HT RS21 has excellent performance of handling and silence, is specially designed for city SUV. Stability tread blocks provide super brake performance and excellent handling. It fits both county and city roads, with comfort and silence.

SUV HIT



UTQG:500/A/A

Rim	Sizes					XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch	kg	kPa	mm	mm
15	235	/	75	R	15		105H	6.5	925	300	733	235
	215	/	70	R	16		100H	6.5	800	300	708	221
	225	/	70	R	16		103H	6.5	875	300	722	228
	235	/	60	R	16		100H	7.0	800	300	688	240
	235	/	70	R	16		106H	7.0	950	300	736	240
16	245	/	70	R	16	XL	111H	7.0	1090	340	750	248
	255	/	70	R	16		111H	7.5	1090	300	764	260
	265	/	70	R	16		112H	8.0	1120	300	778	272
	265	/	75	R	16		116H	7.5	1250	300	804	267
	275	/	70	R	16		114H	8.0	1180	300	792	279
	215	/	65	R	17		99H	6.5	775	300	712	221
	225	/	60	R	17		99H	6.5	775	300	702	228
17	225	/	65	R	17		102H	6.5	850	300	724	228
	235	/	55	R	17		99H	7.5	775	300	690	245
	235	/	60	R	17	XL	106H	7.0	950	340	714	240
	235	/	65	R	17	XL	108H	7.0	1000	340	738	240
	245	/	65	R	17	XL	111H	7.0	1090	340	750	248
	265	/	65	R	17		112H	8.0	1120	300	776	272
	265	/	70	R	17		115H	8.0	1215	300	804	272
18	215	/	50	R	18	XL	95H	7.0	690	340	648	226
	225	/	60	R	18		100H	6.5	800	300	727	228
	235	/	50	R	18	XL	101H	7.5	825	340	693	245
	235	/	55	R	18	XL	104H	7.5	900	340	715	245
	235	/	60	R	18	XL	107H	7.0	975	340	739	240
	255	/	55	R	18	XL	109V	8.0	1030	340	737	265
	265	/	60	R	18	XL	114V	8.0	1180	340	775	272



PracticalMax HIP
RS26

SUV HIP



Drainage



Handling



Silence



Safety

Features & Benefits

UTQG:300/AA/A

Rim	Sizes						XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
									inch				
										kg	kPa	mm	mm
17	235	/	65	R	17		XL	108V	7.0	1000	340	738	240
18	255	/	55	R	18		XL	109W	8.0	1030	340	737	265
	255	/	60	R	18		XL	112V	7.5	1120	340	763	260
19	255	/	50	R	19		XL	107W	8.0	975	340	739	265
	255	/	55	R	19		XL	111W	8.0	1090	340	763	265
20	285	/	45	R	19		XL	111W	9.5	1090	340	739	285
	265	/	50	R	20		XL	111W	8.5	1090	340	774	277
	275	/	40	R	20		XL	106W	9.5	950	340	728	278
	275	/	45	R	20		XL	110W	9.0	1060	340	756	273
	275	/	55	R	20		XL	117W	8.5	1285	340	810	284
	275	/	60	R	20		XL	119V	8.0	1360	340	838	279



PracticalMax A/T RS23



PracticalMax RS23 is specially designed for all terrain SUV. It enhances the performance of grip and sport, for on or off road use. The tiger-teeth tread blocks provide super overland performance, the cut resistance compound improves mileage much.

SUV A/T



Drainage



Handling



Off-road



Safety

Features & Benefits

3D tiger-teeth tread blocks provide excellent grip for both on and off road.

Mixed grooves improve grip in mountain, mud and snow conditions.


Irregular grooves deliver grip off road and super overland capability.



Different depth lateral grooves reduce noise and improve strength of tread blocks.



Special cut resistance compound.



Specially enhanced shoulders prevent damages.



Rim	Sizes						PR	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
									inch	kg	kPa	mm	mm
15	31	x	10.5	R	15	LT	6C	109S	8.5	1030	350	775	268
	LT 215	/	75	R	15		6D	100/97S	6.0	800/730	350	703	216
	LT 225	/	75	R	15		6C	102/99S	6.0	850/775	350	719	223
	LT 235	/	75	R	15		6C	104/101S	6.5	900/825	350	733	235
	P 215	/	70	R	16		4	100T	6.5	800	300	708	221
16	P 225	/	70	R	16		4	103T	6.5	875	300	722	228
	P 235	/	70	R	16		4	106T	7.0	950	300	736	240
	P 245	/	70	R	16		4	107T	7.0	975	300	750	248
	P 275	/	70	R	16		4	114T	8.0	1180	300	792	279
	LT 215	/	85	R	16		10E	115/112S	6.0	1215/1120	550	772	216
	LT 225	/	75	R	16		10E	115/112S	6.0	1215/1120	550	744	223
	LT 235	/	85	R	16		10E	120/116S	6.5	1380/1260	550	806	235
	LT 245	/	75	R	16		10E	120/116S	7.0	1380/1260	550	774	248
	LT 265	/	70	R	16		8D	117/114T	8.0	1285/1180	450	778	272
	LT 265	/	75	R	16		10E	123/120S	7.5	1550/1400	550	804	267
	LT 285	/	75	R	16		10E	126/123S	8.0	1700/1550	550	834	286
17	P 265	/	65	R	17		4	112T	8.0	1120	300	776	272
	LT 265	/	70	R	17		10E	121/118S	8.0	1450/1320	550	804	272

Sidewall: both RBL and WL are available.



PracticalMax MIT RS25

PracticalMax M/T RS25 is specially designed for ORV, providing super driving force, grips, anti-skidding, excellent handling. It's the best choice to challenge hills, mud, and snow.

SUV MIT



Drainage



Breaking



Off-road



Safety

Features & Benefits

- Big pattern blocks and wider grips, provide excellent driving force, grips and anti-skidding on off roads.

- Double or triple casings improve strength a lot, meet the demand of the worst condition.



- Protecting dam and rough design on shoulder improve impact resistance and durability.



- Hexagon bead ring with single endless steel wire improves a lot the stability.



Rim	Sizes						PR	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
									inch	kg	kPa	mm	mm
15	LT	31	x	10.5	R	15	6C	109Q	8.5	1030	350	775	268
	LT	235	/	85	R	16	10E	120/116Q	6.5	1380/1260	550	806	235
16	LT	245	/	75	R	16	10E	120/116Q	7.0	1380/1260	550	774	248
	LT	265	/	75	R	16	10E	123/120Q	7.5	1550/1400	550	804	267
17	LT	285	/	75	R	16	10E	126/123Q	8.0	1700/1550	550	834	286
	LT	265	/	70	R	17	10E	121/118Q	8.0	1450/1320	550	804	272



Features & Benefits

Two circumferential central ribs provide super wear-resistance.

Convex tread blocks provide excellent traction and prevent sideslip.



Circumferential tread blocks on shoulders deliver excellent stability and handling.

Special outline avoid eccentric wear.



DurableMax
RS01



DurableMax RS01 is specially designed for commercial vans and light trucks. It is suitable for overload conditions and brings benefit.

Van/LTR



Wear



Safety



Handling



Breaking

Rim	Sizes						PR	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
									inch	kg	kPa	mm	mm
13	165	/	70	R	13	C	6	88/86R	5.0	560/530	375	562	170
	165			R	13	C	6	89/88R	4.5	580/560	350	596	167
14	175			R	14	C	8	99/98R	5.0	775/750	450	634	178
	185			R	14	C	8	102/100R	5.5	850/800	450	650	188
	195			R	14	C	8	106/104R	5.5	950/900	450	666	198
15	195			R	15	C	8	106/104R	5.5	950/900	450	693	196
	195	/	70	R	15	C	8	104/102R	6.0	900/850	450	655	201
	205	/	65	R	15	C	8	102/100T	6.0	850/800	375	647	209
	215	/	65	R	15	C	8	104/102T	6.5	900/850	375	661	221
	215	/	70	R	15	C	8	109/107R	6.5	1030/975	450	683	221
	225	/	70	R	15	C	8	112/110R	6.5	1120/1060	450	697	228
	185	/	75	R	16	C	8	104/102R	5.0	900/850	475	684	184
16	195	/	65	R	16	C	8	104/102R	6.0	900/850	475	660	201
	195	/	75	R	16	C	8	107/105R	5.5	975/925	475	698	196
	205	/	65	R	16	C	8	107/105R	6.0	975/925	475	672	209
	205	/	75	R	16	C	10	113/111R	5.5	1150/1090	525	714	203
	215	/	60	R	16	C	8	108/106T	6.5	1000/950	475	664	221
	215	/	65	R	16	C	8	109/107R	6.5	1030/975	475	686	221
	215	/	75	R	16	C	10	116/114R	6.0	1250/1180	525	728	216
	225	/	65	R	16	C	8	112/110R	6.5	1120/1060	475	698	228
	235	/	65	R	16	C	8	115/113R	7.0	1215/1150	475	712	240
WSW Series	185			R	14	C	8	102/100R	5.5	850/800	450	650	188
	195			R	14	C	8	106/104R	5.5	950/900	450	666	198
	195			R	15	C	8	106/104R	5.5	950/900	450	693	196



TouringMax⁺ AS H201

TouringMax⁺ AS H201 is high-end all season touring design, provides overlong mileage and excellent performance in both dry and wet conditions. The low heat compound delivers security in long journey. The optimized section design improves comfort much.



Touring



Comfort



Drainage



Silence



Wear

Features & Benefits

- Special outline and compound provides overlong mileage.



- 4 wide grooves deliver excellent water evacuation.

- Endless steel beading and belts provide uniformity and comfort.



- Symmetrical design delivers low noise.

- All Season design.



UTQG:700/A/B

Rim	Sizes						LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch	kg	kPa	mm	mm
15	P	205	/	70	R	15	96T	6.0	710	300	669	209
	P	215	/	70	R	15	98T	6.5	750	300	683	221
	P	225	/	70	R	15	100T	6.5	800	300	697	228
	P	205	/	75	R	15	97T	5.5	730	300	689	203
	P	215	/	75	R	15	100T	6.0	800	300	703	216
	P	225	/	75	R	15	102T	6.0	850	300	719	223
16	P	235	/	75	R	15	105T	6.5	925	300	733	235
	P	205	/	55	R	16	91T	6.5	615	300	632	214



DurableMax Taxi RS01



DurableMax Taxi RS01 is specially designed for taxis. It uses 3 circumferential grooves, wide tread blocks, and especially hyperfine carbon, improves a lot mileage and safety, and also reduces rolling resistance much. It brings security and benefit for taxi drivers.

Taxi



Fuel-saving



Safety



Handling



Wear

Features & Benefits

- 2 circumferential central ribs provide super wear-resistance.
- Circumferential tread blocks on shoulders deliver excellent stability, handling and security.

- Imported hyperfine carbon improves a lot mileage and reduces rolling resistance much.



UTQG:800/A/B

Rim	Sizes					XL	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
								inch	kg	kPa	mm	mm
13	165	/	70	R	13		79T	5.0	437	300	562	170
	165	/	70	R	13	XL	83T	5.0	487	340	562	170
	175	/	70	R	13		82T	5.0	475	300	576	177
	185	/	70	R	13		86T	5.5	530	300	590	189
14	165	/	70	R	14		81T	5.0	462	300	588	170
	175	/	65	R	14	XL	86T	5.0	530	340	584	177
	175	/	70	R	14		84T	5.0	500	300	602	177
	185	/	60	R	14		82T	5.5	475	300	578	189
15	195	/	60	R	14		86T	6.0	530	300	590	201
	185	/	65	R	15		88T	5.5	560	300	621	189
	195	/	60	R	15		88H	6.0	560	300	615	201
	195	/	65	R	15		91H	6.0	615	300	635	201
16	205	/	65	R	15		94H	6.0	670	300	647	209
	205	/	55	R	16		91V	6.5	615	300	632	214



DurableMax RS03



DurableMax RS03 is designed especially for sport trailer. The Z shape tread blocks provide excellent traction.

Sport Trailer



Comfort



Fuel-saving



Silence



Safety


Features & Benefits

4 draining grooves bring excellent drainage.

Soft central blocks and hard Z shape blocks can meet all terrains.

Wider tread brings extra grips and traction.

Thick sidewall and special wearing compound bring long mileage.

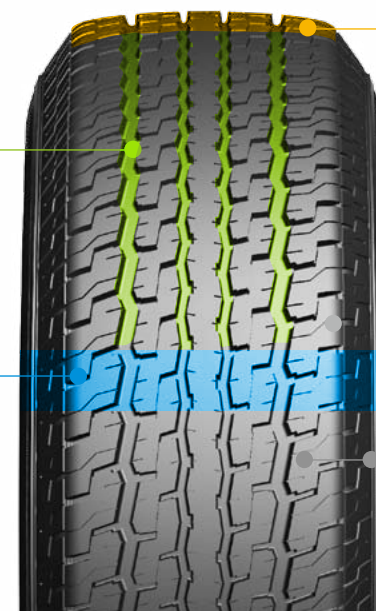

Rim	Sizes						PR	LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
									inch	kg	kPa	mm	mm
13	ST	175	/	80	R	13	6C	91/87	5.0	615/545	350	610	177
14	ST	205	/	75	R	14	6C	100/96	5.5	800/710	350	664	203
	ST	215	/	75	R	14	6C	102/98	6.0	850/750	350	678	216
15	ST	205	/	75	R	15	6C	101/97	5.5	825/730	350	689	203
	ST	225	/	75	R	15	6C	107/102	6.0	975/850	350	719	223
	ST	225	/	75	R	15	8D	113/108	6.0	1150/1000	450	719	223
16	ST	235	/	80	R	16	10E	123/119	6.5	1550/1360	550	782	235
	ST	235	/	85	R	16	10E	125/121	6.5	1650/1450	550	806	235
	ST	235	/	85	R	16	12F	128/124	6.5	1800/1600	660	806	235



IceMax RW501

IceMax RW501 is specially designed for ice and snow area, providing excellent handling on snow or wet road.

Winter



Snow



Drainage



Breaking




Handling

Features & Benefits

- Four ribs and continuous grips getting wider from centre to shoulder, provide excellent snow removes.

- Detailed 3D sipes improve grips and traction on snow road, also improve the strength of blocks, providing excellent handling.



- Improved shoulder blocks and small absorption holes, provide excellent grips on wet, snow and ice road.

- Special cold resistance compound for tread provide excellent breaking and safety.

Rim	Sizes				LI/SR	Standard Rim	Max. Load	Max. Pressure	Overall Diameter	Section Width
						inch	kg	kPa	mm	mm
13	155	65	R	13	73T	4.5	365	300	532	157
	165	/ 70	R	13	79T	5.0	437	300	562	170
	175	/ 70	R	13	82T	5.0	475	300	576	177
14	165	/ 60	R	14	75T	5.0	387	300	554	170
	165	/ 70	R	14	81T	5.0	462	300	588	170
	175	/ 65	R	14	82T	5.0	475	300	584	177
	175	/ 70	R	14	84T	5.0	500	300	602	177
	185	/ 60	R	14	82T	5.5	475	300	578	189
	185	/ 65	R	14	86T	5.5	530	300	596	189
	185	/ 70	R	14	88T	5.5	560	300	616	189
15	195	/ 60	R	14	86T	6.0	530	300	590	201
	185	/ 60	R	15	84H	5.5	500	300	603	189
	185	/ 65	R	15	88H	5.5	560	300	621	189
	195	/ 55	R	15	85H	6.0	515	300	595	201
	195	/ 60	R	15	88H	6.0	560	300	615	201
	195	/ 65	R	15	95T	6.0	615	300	635	201
	205	/ 65	R	15	94H	6.0	670	300	647	209
	215	/ 70	R	15	98T	6.5	750	300	683	221
	235	/ 75	R	15	XL 109T	6.5	1030	340	733	235
	195	/ 60	R	16	89T	6.0	580	300	640	201
16	205	/ 55	R	16	91H	6.5	615	300	632	214
	205	/ 60	R	16	XL 96H	6.0	630	300	652	209
	215	/ 60	R	16	XL 99H	6.5	690	340	664	221
	215	/ 65	R	16	98H	6.5	750	300	686	221
	215	/ 70	R	16	100T	6.5	800	300	708	221
	225	/ 55	R	16	XL 99H	7.0	690	300	654	233
	225	/ 60	R	16	98T	6.5	750	300	676	228
	225	/ 70	R	16	XL 107T	6.5	875	300	722	228
	235	/ 60	R	16	100T	7.0	800	300	688	240
	235	/ 70	R	16	106T	7.0	950	300	736	240
	245	/ 70	R	16	107T	7.0	975	300	750	248
	265	/ 70	R	16	112T	8.0	1120	300	778	272
	215	/ 50	R	17	XL 95H	7.0	690	340	648	226
17	215	/ 55	R	17	94H	7.0	670	300	668	226
	215	/ 60	R	17	96H	6.5	710	300	690	221
	225	/ 50	R	17	XL 98H	7.0	670	300	658	233
	225	/ 55	R	17	XL 101H	7.0	730	300	680	233
	225	/ 60	R	17	99H	6.5	775	300	702	228
	225	/ 65	R	17	102T	6.5	850	300	724	228
	235	/ 55	R	17	XL 103H	7.5	775	300	690	245
	235	/ 65	R	17	XL 108T	7.0	900	300	738	240
	245	/ 65	R	17	XL 111H	7.0	1090	340	750	248
	215	/ 55	R	18	95H	7.0	690	300	693	226
18	225	/ 45	R	18	91H	7.5	615	300	659	225
	225	/ 55	R	18	98H	7.0	750	300	705	233
	235	/ 55	R	18	100H	7.5	800	300	715	245
	235	/ 60	R	18	XL 107T	7.0	875	340	739	240
	245	/ 45	R	18	XL 100H	8.0	800	340	677	243
	255	/ 55	R	18	105H	7.0	925	300	737	265
	245	/ 55	R	19	103H	7.5	875	300	753	253
19	255	/ 50	R	19	XL 107H	8.0	975	340	739	265
20	255	/ 50	R	20	XL 109H	8.0	1030	340	764	265
LTR	165		R	13	C 94/93T	4.5	670/650	450	596	167
	175		R	14	C 99/97T	5.0	775/730	450	634	178
	185		R	14	C 102/100S	5.5	850/800	450	650	188
	195	/ 70	R	15	C 104/102R	6.0	900/850	450	655	201
	205	/ 70	R	15	C 106/104S	6.0	950/900	450	669	209
	225	/ 70	R	15	C 106/103S	6.5	950/875	450	697	228
	LT 215	/ 70	R	15	98/95T	6.5	750/690	350	683	221
	LT 215	/ 75	R	15	100/97T	6.0	800/730	350	703	216
	LT 235	/ 75	R	15	104/101T	6.5	900/825	350	733	235